




FIRE RATED GRP Enclosures

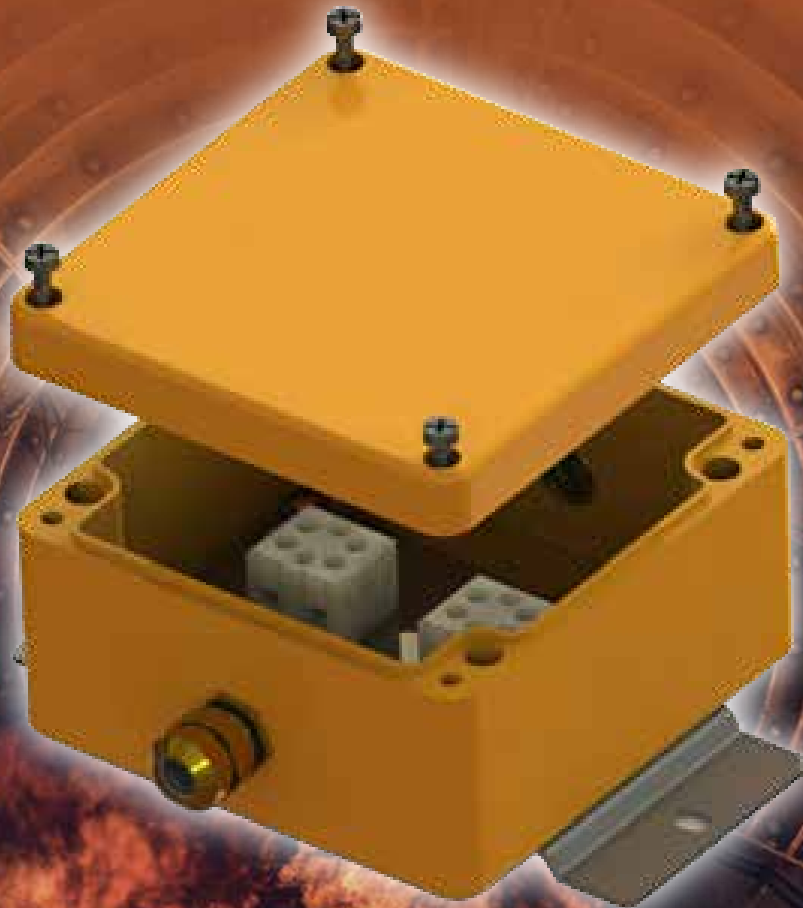


CI 'C'
CI 'W'
CI 'Z'

(As per BS 6387 : 2013)

FIRE RATED GRP ENCLOSURE

Technical Data :

Material	: Glass Reinforced Polyester
Ingress Protection	: IP 66
Impact Energy	: 7 Joules
Gasket and Temperature range	: -40°C to +80°C (Neoprene) -60° C to +110°C (Silicone)
Colour	: Black (RAL 9011) Grey (RAL 7000)
Surface resistance	: >10 ¹² Ω (Grey) <10 ⁹ Ω (Black)
Flammability	: V0 (UL 94)
Certification	: BS 6387:2013

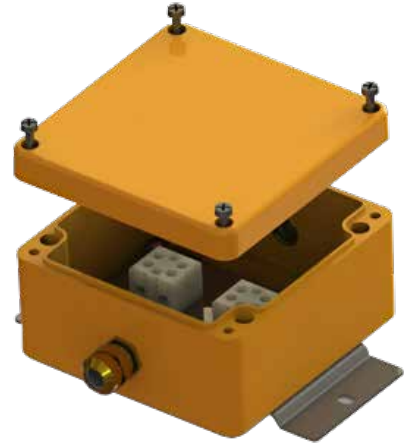

PRODUCT SPECIFICATION	
Rated Insulation Voltage	800 V
Current Carrying Capacity	57 A
Tightening Torque	1.2 Nm

PRODUCT CODE	DIMENSIONS (MM)		
	PART NO.	L	B
FRGJB 01	80	75	55
FRGJB 02	110	75	55
FRGJB 03	122	120	90
FRGJB 04	80	75	75
FRGJB 05	160	75	55
FRGJB 06	160	75	75
FRGJB 07	160	160	90
FRGJB 08	110	75	75
FRGJB 09	190	75	55
FRGJB 10	190	75	75
FRGJB 11	220	120	90
FRGJB 12	255	250	120
FRGJB 13	260	160	90
FRGJB 14	360	160	90
FRGJB 15	400	250	120
FRGJB 16	400	405	120
FRGJB 17	255	250	160
FRGJB 18	400	250	160
FRGJB 19	400	405	201
FRGJB 20	600	250	121
FRGJB 21	600	250	161